


# M220

## Weighing Indicator

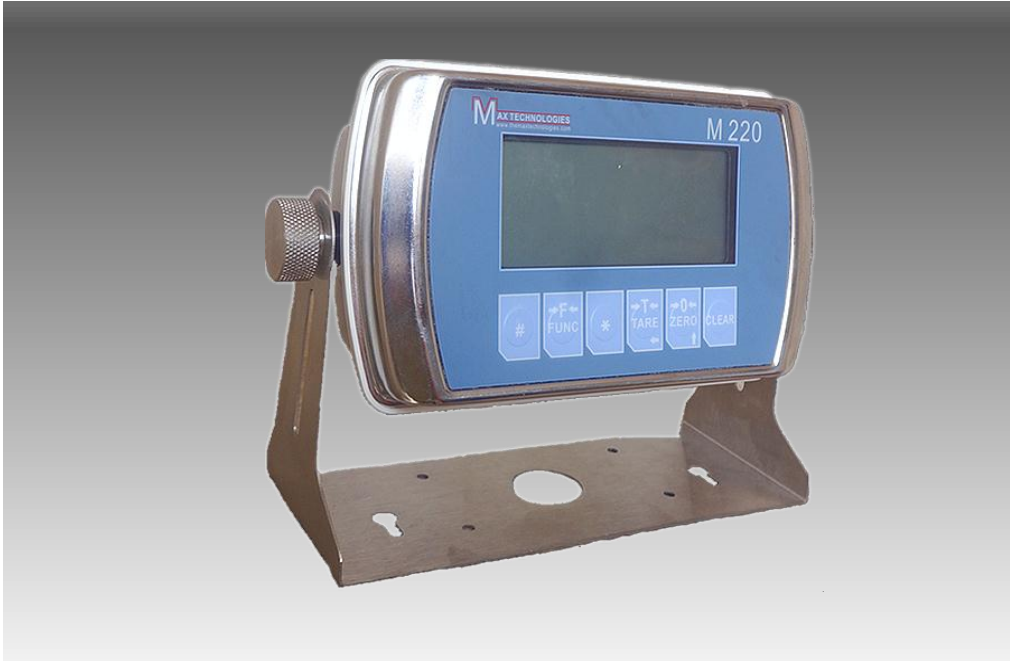

### FEATURES

- Multifunctional LCD display
- Peak value hold function
- External serial port printing function
- Unit switch function(kg/lb/t)
- Manual accumulation and automatic accumulation.
- Preset tare function
- High-low limits alarm function, HIGH-OK-LOW status indication
- Four grades battery indication, low power alarm and auto power off function
- Auto-sleep and multiple energy-saving mode
- High precision A/D conversion with readability 1/30000
- Animal weighing function
- Multiple grades backlight brightness setting
- Optional RS232 and RS485 communication interface, and baud rate is selectable

### PRODUCT SPECIFICATIONS

Name	M220
Precision Grade	3 Grades
Max Division	3000
Input- Signal Range	-19mV ~ 19mV
Conversion Rate	≤ 80 Time/Sec
Nonlinear	≤ 0.0015%
Power Supply	DC 5V
Load Cell Communication	Able to Connect 1-4 350Ω Load Cell
Division	1/2/5/10/20/50 (Selectable)
Power	AC 100- 240V ; 50-60Hz (AC adapter) DC 4-6V (Optional: Rechargeable Battery or 4pcs 3A Dry Batteries)
Operation Temperature	-10°C ~ 40°C
Signal Output Method	Serial Output, Current Loop Signal
Distance Of Transportation	≤200 Serial Communication Interface
Baud Rate	600/1200/2400/4800/9600 Optional

The technical data given here serve only as a product description and must not be interpreted as guaranteed characteristics in the Legal sense.

3193 N, Drinkwater Blvd, P.O.Box 32662, Scottsdale, AZ 85251, U.S.A

Phone: # 480-240-1299

Fax: # 480-240-1300

Email: Info@themaxtechnologies.com

Max Technologies reserves the right make changes to the technology, features, specification and design of the equipment without notice.